

→ Kinetico

K10 (Ref.910205)

Direct flow reverse osmosis system

SPECIFICATIONS

PEAK FLOW	1,6 lpm
INLET TEMPERATURE (max.-min.)	38 - 5 °C
INLET TDS (max)	1500 ppm
INLET PRESSURE (min.-max.)	4 bar - 1 bar (400kPa-100kPa)
PUMP	High performance diaphragm Booster pump
POWER SUPPLY	24 Vdc
EXTERNAL ADAPTER	100-240V. 50/60Hz: 24Vdc.

ORIGINAL CONSUMABLES

5 µm polypropylene filter (Ref. 910207)
10 µm block carbon filter (Ref. 910208)
600GPD RO membrane (Ref. 910210)
10 µm block postcarbon filter (Ref. 910209)



AQUASTOP



LED STATUS



DIRECT FLOW



FILTER CONTROL



AUTO FLUSHING



CAPSULATED MEMBRANE



HIGH EFFICIENCY




HIGH PERFORMANCE



DOUBLE FLOW



SOUND WARNINGS

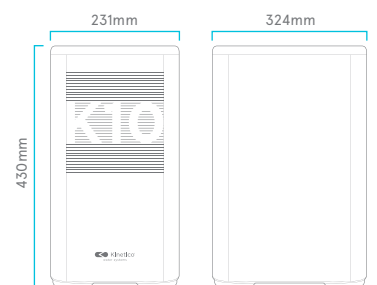

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF18000008U6 and 13/02/2018 as a date of entry of the authorization.