

→ Reverse osmosis Direct flow

LÄTT 600 GPD

(Ref. 910389)

SPECIFICATIONS

MAXIMUM FLOW	1,8 lpm
WEIGHT	12 kg
INLET TEMPERATURE (max.-min.)	38°C / 5°C
INLET TDS	1500 ppm
INLET PRESSURE	4 bar - 1 bar (400kPA-100kPa)
PREFILTER	combi 5 micron pp + high quality block carbon
POSTFILER	high quality block carbon
MEMBRANE	600GPD
FAUCET	Smart faucet
PUMP	Booster pump
POWER SUPPLY	24 Vdc
ADAPTER	100-240V. 50/60Hz: 24Vdc



FILTER CONTROL



QUALITY CONTROL



SOUND WARNINGS



SMART FAUCET



LED STATUS



VERSATILITY



HIGH EFFICIENCY




AQUASTOP SYSTEM



ORIGINAL CONSUMABLES

Post Carbon (Ref. 910131)
Combinated filter. (Ref. 910130)
Reverse osmosis membrane (Ref. 910132)

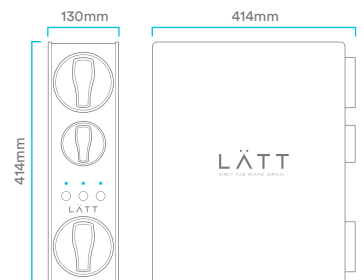

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF18000008U6 and 13/02/2018 as a date of entry of the authorization.