

→ Reverse osmosis

RO LYKKE

(Ref.910527)

Direct Flow system

DESCRIPTION

5-stage equipment
Installation kit
Intelligent faucet with status messages
High-performance membrane with self-flushing
Integrated hydraulic circuit
Easy maintenance

SPECIFICATIONS

| | |
|---------------------------|-------------------------------|
| WEIGHT | 12,5 kg |
| FLOW | 1,6-2,1 lpm |
| TEMPERATURE (max. - min.) | 38 °C - 5 °C |
| INLET TDS (max.) | 1500 ppm |
| PRESSURE (max. - mmn.) | 4 - 1 bares (400kPa - 100kPa) |
| MEMBRANE | 600 GPD |
| FAUCET | Smart faucet |
| PUMP | Booster |
| POWER SUPPLY | 24VDC / 36VDC |
| EXTERNAL ADAPTER | 230VAC 50/60 Hz |



QUALITY CONTROL



DOUBLE FLOW



FILTER CONTROL



CAPSULATED MEMBRANE



FLUSHING READY



PRESSURE PUMP



LED STATUS




**WATER QUALITY
WARNING**

ORIGINAL CONSUMABLES

Combined pre-filter pp 5 µm+charcoal GAC (Ref. 910540)

Membrane RO 600 GPD (Ref. 910541)

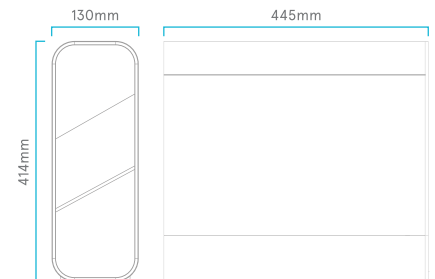

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF18000008U6 and 13/02/2018 as a date of entry of the authorization.