

→ Reverse osmosis

# RO REKA 600

(Ref.910451)

Direct Flow system

## DESCRIPTION

Reverse Osmosis System.  
Direct Flow.  
Without water tank.  
Low cost of maintenance.  
Long life of filters and membrane.  
Great design and versatility.

## SPECIFICATIONS

WEIGHT	12 kg
FLOW	1,6 lpm / 2,1 lpm
TEMPERATURE (max. - min.)	38 °C - 5 °C
INLET TDS (max.)	1500 ppm
PRESSURE (max. - mmn.)	4 bar - 1 bar (400kPa - 100kPa)
MEMBRANE	600 GPD
FAUCET	faucet smart
POWER SUPPLY	24 Vdc
EXTERNAL ADAPTER	230 Vac 50 / 60 Hz: 24 Vdc

## ORIGINAL CONSUMABLES

Combi sediment + carbon block White (cód. 910465)
Membran RO 600GPD White (Ref.910466)



FILTER CONTROL



QUALITY CONTROL



SOUND WARNINGS



LED STATUS



HIGH EFFICIENCY RECOVERY




AQUASTOP



SMART FAUCET



ELECTRONIC ADAPTER

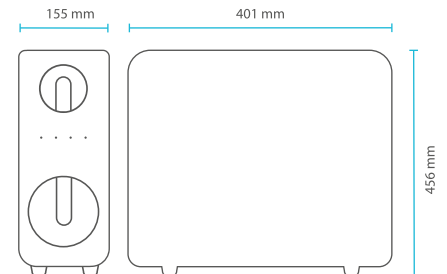

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC  
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 far WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF18000008U6 and 13/02/2018 as a date of entry of the authorization.