

→ Reverse Osmosis

# RO VERSA (Ref.752519) PUMP

Compact domestic RO system with pump

## DESCRIPTION

5 stages RO system  
Installation Kit  
Special 1-way faucet  
Green Filter membrane  
Integrated tank  
High performance pump

## SPECIFICATIONS

DIMENSIONS	419 mm x 408 mm x 228 mm
WEIGHT	15 kg
INLET TEMPERATURE	40 °C - 2 °C
INLET TDS	2000 ppm
MAX. INLET PRESSURE	2.5 - bar 250 - kPa
MEMBRANE	1812 75 GPD
PUMP	UP 7000
FAUCET	Mini Robin with ceramic valve
POWER SUPPLY	24 Vdc 28 W
EXTERNAL ADAPTER	110 - 240V. 50/60Hz 24 W.

## ORIGINAL CONSUMABLES

Inline QC 5µm sediment prefilter (Ref.651203)
GAC Inline QC carbon prefilter (Ref.651201)
FP-A remineralizer postfilter (Ref.291920)
75 GPA GREEN FILTER MEMBRAND (Ref.767202)



**DIRECT ACCESS**  
Easy access and maintenance



**DOUBLE FLOW**  
Higher flow of produced water



**CLICK**  
Quick connectors and maximum safety



**INSERT**  
Maximum security in tube connections




**VERSATILITY**  
Several installation options



**AQUASTOP**  
Automatic leakage sensor



**Q CARBON**  
Carbon according to UNE-EN 12915-1

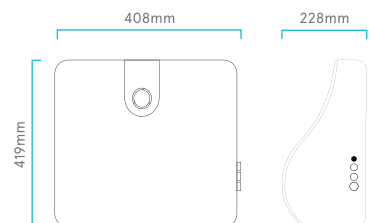

WLG (B-60326279), is member of the Water Quality Association.



ACCREDITED BY ENAC  
Certif. nº 34/5200/14/0712

The trading of water treatment and household appliances as well as designing and teaching of non-official training courses related with its technology are certified and comply with the UNE-ISO-9001 for WLG (B-60326279).



WLG (B-60326279) is an Aqua España member, who belongs Aqua Europa (Federation of European nation associations).



WLG (B-60326279), has the rights granted for Authorized Economic Operator with number ESAEOF18000008U6 and 13/02/2018 as a date of entry of the authorization.